Got Ironitis?

Ironitis is a condition caused by continuously dealing with moderate to high levels of iron that cause typical aeration filters to plug up and fail resulting in countless service calls and customers constantly complaining about their water quality. Side effects of currently popular single tank aeration filters include: plugged seals & spacers, dried up seals, with jammed pistons and other issues associated with iron build up. If you have experienced any of these problems please contact Clearion, the experts in dealing with this growing epidemic, for a cure.



Unique 5-Cycle Valve



Features two-button programming with safe 12VDC power as follows:

- 1. Slow "creeper gear" air release cycle
- 2. Backwash cycle Field adjustable
- Rest cycle for well recovery time Field adjustable
- Air replenish cycle or Optional Ozone Field adjustable
- 5. Rinse Cycle Field Adjustable
- 6. Service Position

Power Backup System



The 9-volt battery not only keeps the clock time upto-date during a power outage but also powers the valve to a "no flow" position if power is lost during a backwash or cleaning cycle. This can prevent hundreds or even thousands of gallons of water from running to drain while the main power is out.

> 7 Year Limited Warranty!

*Patent 9212070 and Multiple Other Patents Pending

Extra Cleaning Power



The industry-first, "pumpless" Oxyclean™ injection system allows for intermittent injection of chlorine or peroxide for bed cleansing and control of iron and sulfur bacteria with the optional feed tank. This cycle is ready-to-use and easily activated in the main menu. No feed pumps, control boxes or flow switches are needed! It's all done in the proprietary valve head.

Legacy View App






Control valve can connect via Bluetooth with Smart Phones and tablets to access advanced diagnostics, simplified setup, water use history, dealer information, and rental lockout mode.

Must be within Bluetooth™ range.

External Air Injector

Precise air induction directly into the media tank allows for maximum efficiency. The external position prevents control valve fouling with easy access to the removable, easy-to-clean venturi assembly.





Single Tank Design
Uses Less Water Than
ANY OTHER

ANY OTHERWATER FILTER

in the Industry!

Access Cap

Provides for easy inspection and servicing of media

Superior By Design

Iron is not oxidized until water enters the top of the media tank ensuring the control valve remains free of iron build up and the associated problems

Free Air Zone

Oxidizes iron, manganese and sulfur to filterable particles

Aeration Balls

Help speed oxidation of contaminants by contact asorption

Ozone Complete

The optional ozone module provides chemical free enhanced oxidation to help recharge the media and control iron and sulfur bacteria



Save THOUSANDS of Gallons of Water Per Year with the


The competition has to backwash every night to recharge the free air in the top of the tank. Our proprietary forward and reverse drive motor, and independently programmable air draw and backwash cycles, allow us to draw air into the system anytime without a full backwash saving thousands of gallons of water per year!

We use MUCH LESS!


The competition uses enough water in a year to FILL this swimming pool.

Performance Charts

Sulfur Removal Capacity

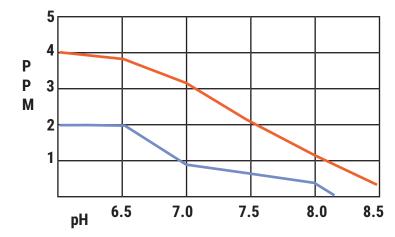

Iron Removal Capacity

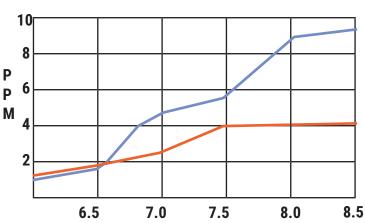

Standard Sidekick Model Sidekick 'S' Sulfur Model



You and Your Customers Deserve A Sidekick!

Available in 1.5 and 2.5 cubic foot units, you'll be thrilled with the cutting edge valve technology, complete programming flexibility, huge water savings, 7 year warranty, Bluetooth control and all the other benefits from the finest aeration technology available.