



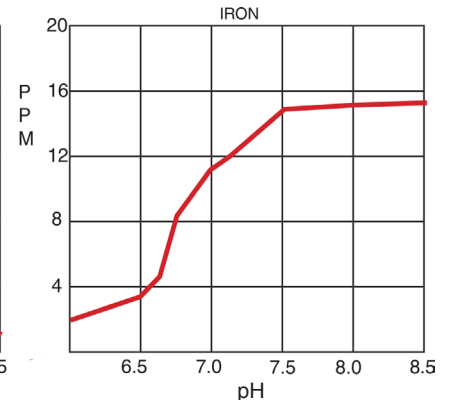

**Features**

- Treats Iron, Sulfur, Manganese
- 300 Series™ control valve
- Legacy View Bluetooth enabled control valve for advanced diagnostics and simplified setup
- Adjustable cycle times
- High backwash flow capability
- 3/4" FNPT stainless steel bypass
- 1" FNPT stainless steel bypass (optional)
- Features Enpress® Vortech™ distributor plate
- Poly wound Tank
- Poly wound mineral tank
- Large "UT" style aeration tank (optional)
- Simple 9 volt battery back-up keeps electronic meter active and will motor control valve to shut off position if in regeneration during power failure

General Specifications	CLF10-300HD	CLF12-300HD	CLF13-300HD	CLF14-300HD
Filter Media Type	SMART BLEND™			
Filter Media Capacity (cu ft)	1.5	2.0	2.5	3.0
<b>REACTR™</b> Tank (polyglass)	10 x 54	10 x 54	10 x 54	16 x 40
Mineral Tanks (Vortech)	10 x 54	12 x 52	13 x 54	13 x 65
Service Flow Rate - Continuous (gpm)	5	6	8	9
Service Flow Rate - Intermittent (gpm)	7	8	10	11
Backwash Flow Rate (gpm)	5.0	6.0	7.0	10.0
Gallons Used / Regeneration	100	120	140	200
Space Required - Filter Tank	10 x 10 x 62	10 x 10 x 62	10 x 10 x 62	16 x 16 x 73
Approximate Shipping Weight (lbs)	165	236	270	311

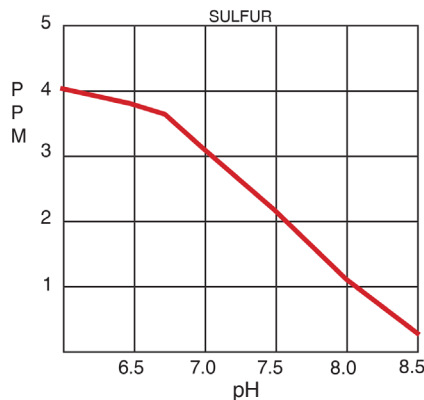

Note: Caution should always be used in sizing filters. Always choose a unit by satisfying the *Backwash Requirement*. Use of a flow control in the Service Line is highly recommended. Consult the factory or your field sales person with questions. Oxyclean can be added to any existing Reactr or Reactr VS system.