



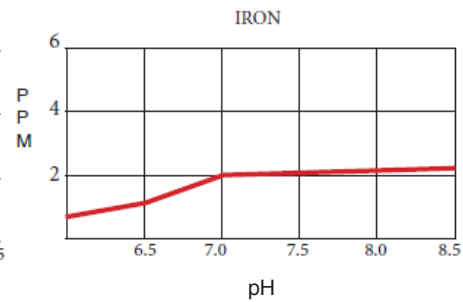

Features

- Proprietary 360 Series control valve with independently programmable air draw & backwash cycles saving THOUSANDS of gallons of water per year
- Legacy View Bluetooth enabled control valve for advanced diagnostics and simplified setup
- Simplicity of a single tank aeration system that can be used with any type of well pump and system (standard submersible, constant pressure, jet pump)
- The control valve slowly releases compressed air charge prior to backwash cycle eliminating the explosive blast that can dislodge the drain line
- Precise external air injection directly into the media tank to help prevent control valve fouling & for ease of service
- Operates on low 12 vdc power
- Catalytic Carbon and KDF Cubes for Sulfur Reduction
- Enpress® Vortech™ distributor plate for exceptional backwashing capability
- 3/4" FNPT stainless steel bypass
- 1" FNPT stainless steel bypass (optional)
- Simple 9 volt battery back-up keeps electronic meter active and will motor control valve to shut off position if in regeneration during power failure

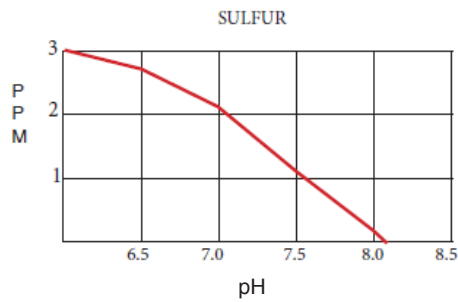

General Specifications	NTF15S	NTF25S
Filter Media Type	CATAYLIC CARBON	
Filter Media Capacity (cu ft)	1.5	2.5
KDF Cubes	1.5 lbs	2.5 lbs
Mineral Tank (Vortech™)	10 X 54	13 X 54
Service Flow Rate - Continuous (gpm)	5	8
Service Flow Rate - Intermittent (gpm)	7	10
Backwash Flow Rate (gpm)	5.0	7.0
Gallons Used / Backwash	106	146
Space Required	10 X 10 X 62	13 X 13 X 62
Approximate Shipping Weight (lbs)	145	221